




Series  
PAFS-1000

# Averaging Flow Sensor

Ideal for Sensing Fan Flow Rates

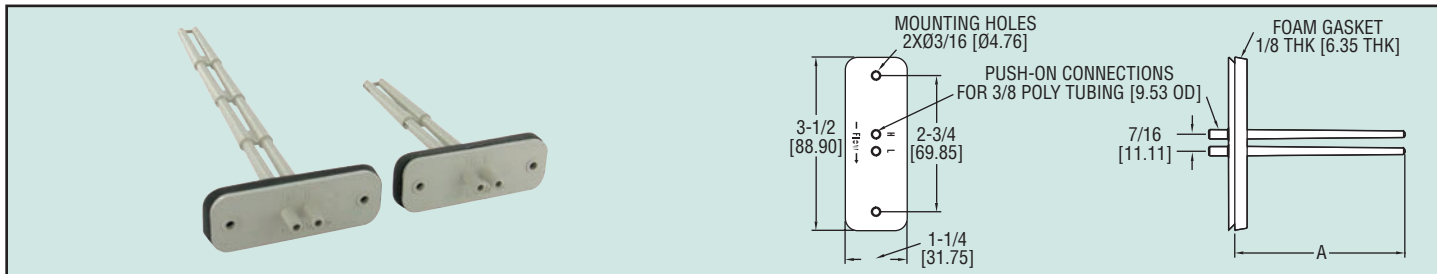

The **Series PAFS-1000 Averaging Flow Sensor** is ideal for sensing differential pressure in the inlet section of variable air volume terminal units and fan terminal units. Units can also be used to sense differential pressure at other locations in the main or branch duct systems.

The “H” port senses total pressure and the “L” port senses static pressure. The difference between these signals is the differential, or velocity pressure.

For models PAFS-1002 to PAFS-1005, up to four sensing points and lengths of 3-5/32” to 9-29/32” (8.02 to 25.26 cm) to accommodate box size diameters of 4” to 16” (10.16 to 40.64 cm) are available. For models PAFS-1006 to PAFS-1011, up to 10 sensing points and lengths from 12-1/2” to 23-29/32” (31.75 to 60.72 cm) are available to accommodate appropriately sized duct dimensions.

## APPLICATION

- Zone control in HVAC systems

## SPECIFICATIONS

**Service:** Air and compatible gases.

**Wetted Materials:** ABS/polycarbonate (UL94-5V).

**Temperature Limits:**

Operating: 40 to 120°F (4 to 49°C);

Storage: -40 to 140°F (-40 to 60°C).

**Process Connection:** 1/4” (6 mm) ID, 3/8” (10 mm) OD tubing.

**Mounting Orientation:** Integral flange with gasket.

**Weight:** 1 oz (28 g).

Model	Length (Dimension A)
PAFS-1002	3-5/32” (8.02 cm)
PAFS-1003	5-13/32” (13.73 cm)
PAFS-1004	7-21/32” (19.55 cm)
PAFS-1005	9-29/32” (25.26 cm)
PAFS-1006	12-1/2” (31.75 cm)
PAFS-1007	14-3/4” (37.47 cm)
PAFS-1008	17-1/8” (43.50 cm)
PAFS-1009	19-13/32” (49.29 cm)
PAFS-1010	21-21/32” (55.01 cm)
PAFS-1011	23-29/32” (60.72 cm)